

TANGREAT

We Save Lives and Prevent leakage of confidence

6BANDS CELLPHONE WIFI JAMMER

This jammer can be used in location where is forbidden used 4G 3G 2G mobile phone and GPS/WiFi



Model No. TG-101A6

TG-101A6 is a Desktop 4G 3G 2G Cellphone Jammer, Adjust Cellphone Wifi jammer, 4G Cellphone GPS Jammer. We strongly recommend this military quality Jammer. It is easy to use, superior design. TG-101A6 is a sophisticated high power desktop cellular phone GPS WiFi jammer. It can be used for all the worldwide network frequency system. It is the best choice for meeting room and testing room applications.



COMPLETE ACCESSORIES

6pcs antennas, Power cable, Power Supply



ADVANTAGES AND FEATURES


- ▶ It can provide 24/7/365 jamming even in a constant cooling system.
- ▶ AC: 110/220V 12V. In case of supplying voltage varies, our voltage regulator design can ensure the device 's normal operation and avoid the abnormality or being burnt
- ▶ Highly efficient double fans with a low noise make the device in a good cooling and continuous work.
- ▶ Output power adjustable design makes the jammer more user-friendly.
- ▶ Each frequency channel can be controlled separately and simultaneously.
- ▶ Totally with a 15Watt high output power makes a more efficient jamming.
- ▶ Shielding range can be up to 30M.
- ▶ Up to 7bands frequency bands, including all the 4G 3G 2G cellular phone bands, with GPS or Bluetooth optional.

TECHNICAL SPECIFICATION

Type	Output Port	Frequency bands	Output Watt	Radius Range
Europe Asia Africa Middle East Market	4G LTE800	780-830MHz	3.5Watt	Up to 30meters
	CDMA800	869-894MHz		
	GSM900	925-960MHz	3.5Watt	
	GSM1800	1805-1880MHz	2Watt	
	3G WCDMA	2110-2170Mhz	2Watt	
	WiFi 2.4Ghz	2400-2485MHz	2Watt	
	4G LTE2600	2620-2690MHz	2Watt	
American Market	4G LTE700	725-770MHz	3.5Watt	Up to 30meters
	CDMA850	851-894MHz	3.5Watt	
	PHS1900	1920-1990MHz	2Watt	
	3G CDMA200	2110-2170MHz	2Watt	
	WiFi 2.4Ghz	2400-2485MHz	2Watt	
	4G LTE 2300	2300-2400MHz	2Watt	
Optional	• Satellite communication systems			
	• Thuraya Iridium Elipso Inmarsat GlobalStar			
	• Aces Odyssey GPS			
	• CDMA450 Cell phone System			
Total Power	15watt			
Power Supply	AC:110/220 V DC12V, Electric Current: 8A			
Power Consumption	75watt			
Shielding Radius	Up to 40 meters, signal strength <= -68dbm			
Device Weight	1.75 KG			
Packing weight	3Kg			
Size	32*11.5*5.5cm			

APPLICATION


Meeting Room, Oil and Gas Storage Facilities, Oil and Gas Fields, Hospitals, Theatres, Recording Studios, Banks, Contract Tendering Rooms, Churches, Conference Rooms, Classrooms, Testing Facilities, Security Services, Military Units, Secret Services, News Conference Rooms, Libraries, Museums, Prisons, Courts, Border Patrol and Drug Enforcement

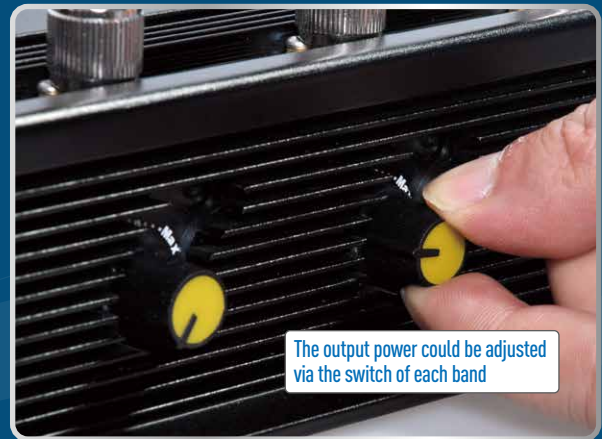

NOTE:

- ▶ Shielding range of the device will be determined by the local signal strength. In different situation, it will be with different performance.
- ▶ While it is working, the surface temperature is about 45°C. It is normal, if it is higher than 45°C , it is abnormal.
- ▶ Please put the power SW to off immediately and try to contact your local distributor or agent.
- ▶ Please try to put the device in a higher position while it is working. It will be better. The suggested height is about 2M.
- ▶ To avoid the loss of function of the device, please try to avoid the device placed on the metal materials.
- ▶ Do not put the device near computers, not book computers, televisions stereos, and radios and so on, in order not to make some interference for these equipments.
- ▶ If the antenna is not properly installed in accordance will the manuals, the shielding range will be not so good.

Wireless Explosion Prevention Expert

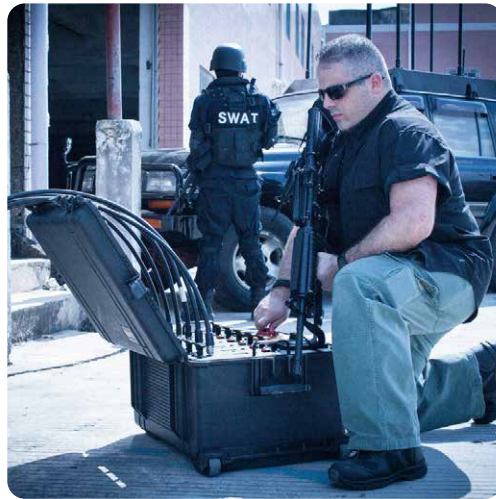

TANGREAT

SHENZHEN TANGREAT TECHNOLOGY CO.,LTD

Add: 4th Floor, R&D Building, Dacheng Industrial Park, Jihua Road, Buji, ShenZhen,518129, China

Tel: 86-755-33611882 Fax: 86-755-33611881 www.tangreat.com

All copyrights are reserved by TANGREAT. Without permission, mustn't be Copied and reproduced. Once discovered, legal liability will be held.